


specifications

DC Resistance	Revc	Ω	3.2	±7.5%	Energy Bandwidth product	EBP	(1/Qes).fs	234.5
Minimum impedance	Zmin	Ω	3	±7.5%	Moving Mass	Mms	g	1.246
Voice Coil inductance	Le	mH	2.77		Suspension Compliance	Cms	um/N	420.795
Resonant Frequency	Fs	Hz	219.8	±20%	Effective Cone Diameter	SD	cm	13.2
Mechanical Q factor	Qms	-	10.042		Equivalent Volume	Vas	mL	104
Electrical Q factor	Qes	-	0.938		Motor Efficiency Factor	BL	T.M	2.385
Total Q facto	Qts	-	0.858		Voice Coil Former Material	VCfm	-	Kapton
Ratio	Fs/Qts	-	256		Voice Coil Inner Diameter	VCd	mm	19.43
Half Space Sensitivity @	1w/1m	dB	82.6 ±2		Gap Height	Gh	mm	2
rated Noise Power(IEC 2685 18.1)	P	W	3		Maximum Linear Excursion	Xmax	mm	1.04
Test Spectrum Bandwidth	FO-20KHz		12dB/Oct		Ferrofluid Type	FF	N/A	NeFeB
					Transducer Size	-	-	51*51
					Transducer Mass	-	g	111.8

Mechanical 2D Drawing

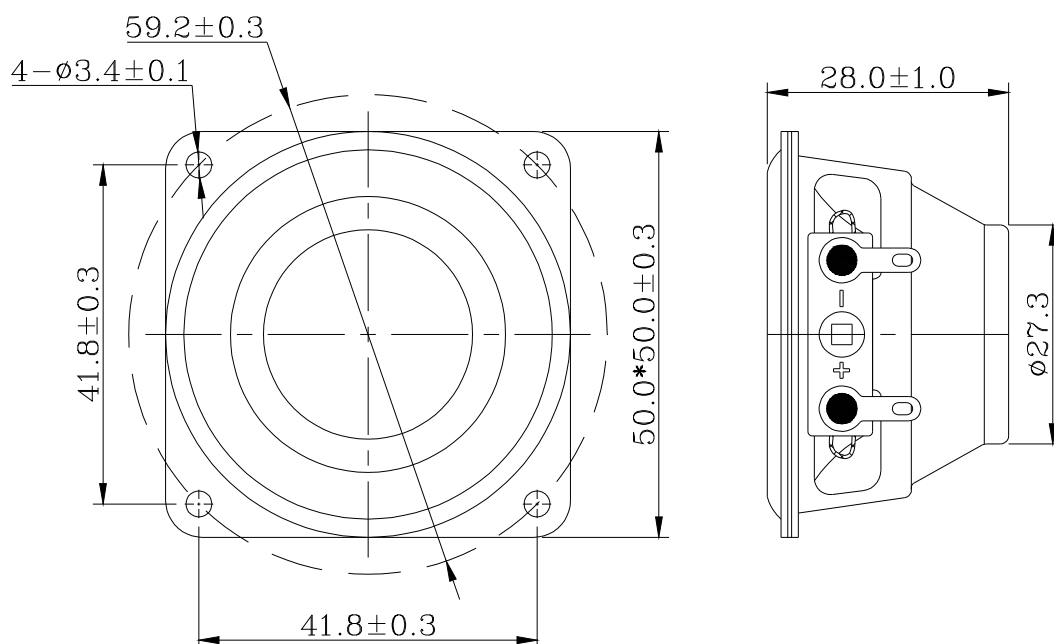

Shenzhen Jiming Technology Co., Ltd

www.jmaxx.cn